

所別： 通訊工程學系碩士班 甲組

科目： 通訊系統

(20%) 1. Given the signals  $x_1(t)$  and  $x_2(t)$  as follows.

(10%) (a) Let  $x_1(t) = \Pi\left(\frac{t}{2}\right) * \text{sinc}(t)$ , where  $\Pi$  represents the rectangular function and  $*$  represents the convolution operation. Find the minimum sampling frequency that can reconstruct  $x_1(t)$  from its samples.

(10%) (b) Let  $x_2(t) = 2\text{sinc}(2t) * \text{sinc}(t)$ . Calculate  $\int_{-\infty}^{\infty} x_2(t) dt$ .

(20%) 2. A message signal  $m(t) = \cos^2(2\pi f_m t)$ ,  $0 \leq f_m \leq W$ , is modulated by a double sideband system where the modulated signal is  $x_c(t) = (A + m(t)) \cos \omega_c t$ , where  $A$  is a constant.

(10%) (a) Compute the bandwidth of the modulated signal.

(10%) (b) An envelope detector, which can simply be implemented by cascading a diode, an RC low-pass filter, and an AC coupling capacitor, is used for demodulation. What is the demodulated output signal?

(10%) 3. A message signal  $m(t) = \frac{3f_m}{f_2} \cos(2\pi f_m t)$ , with the possible frequency range  $f_1 \leq f_m \leq f_2$ , is modulated by a frequency modulation system, where the modulated signal is  $x_c(t) = \cos\left[2\pi f_c t + 2\pi f_d \int m(\alpha) d\alpha\right]$ . Assume  $f_1 = 100$  Hz,  $f_2 = 15$  KHz,  $f_c = 300$  MHz, and  $f_d = 40$  KHz/V, what is the approximate bandwidth of the modulated signal?


(20%) 4. Consider signals given as

$$s_i(t) = a_i \cos \omega_c t + b_i \sin \omega_c t, \quad 0 \leq t \leq T_s,$$

where  $a_i, b_i \in \{\pm A, \pm 3A, \pm 5A\}$  with equal probability. Assume that the signals are transmitted over the AWGN channel with double-sided power spectral density  $\frac{N_0}{2}$ . Let  $E_s$  denote the average energy per signal. For an optimal detector, compute the error probability in terms of  $\frac{E_s}{N_0}$ .

(15%) 5. Consider the matched-filter receiver designed for the transmitter with two signals  $s_1(t) = A \cos \omega_c t$  and  $s_2(t) = -2A \cos \omega_c t$ . Compute the detected error probability of this receiver if the transmitted signals are  $s_1(t) = 2A \cos \omega_c t$  and  $s_2(t) = -A \cos \omega_c t$  in fact. Assume that  $s_1(t)$  and  $s_2(t)$  are transmitted with equal probability.

(15%) 6. Consider a communication system as follows. At the transmitter, one information bit is fed into an encoder of the repetition code to obtain a 3-bit output. Then the three coded bits are sent into a BPSK modulator successively. Suppose that BPSK signals are transmitted over the AWGN channel with double-sided power spectral density  $\frac{N_0}{2}$ . Consider a receiver shown below. The matched filter is used to produce the soft-decision value of coded bit  $v_k$ ,  $k \in \{1, 2, 3\}$ . Then the decoder makes a maximum-likelihood decision of the information bit according to  $v_1, v_2$  and  $v_3$ . Represent the error probability of the information bit in terms of  $\frac{E_b}{N_0}$ , where  $E_b$  denotes the energy per information bit.

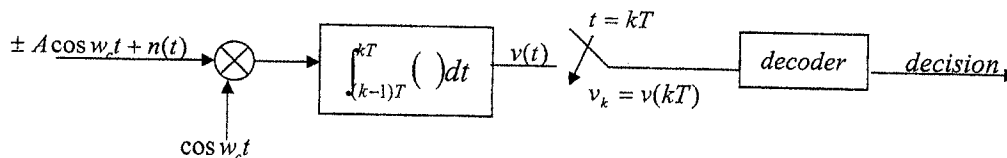

參  
考  
用